


HPS-IP67



CRI
> 82

IP67





- slim, elegant aluminium profile
- various radiation characteristics
- high protection of IP67
- external power supply
- customized production
- white resin
- RGB on request

Technical specifications

lamp	LED			
constant current	350 mA	700 mA	1050 mA	
power	1 W/LED	2,2 W/LED	3,33 W/LED	
luminous flux	120 lm/LED	240 lm/LED	360 lm/LED	
splitting	8 – 25 cm			
optics	10°	30°	50°	10x50°
dimensions	(BxH) 32 x 19,5 mm			
surface	Aluminium anodised			
colour temp.	2700 K	3000 K	4000 K	
protection	IP67			



Drawing

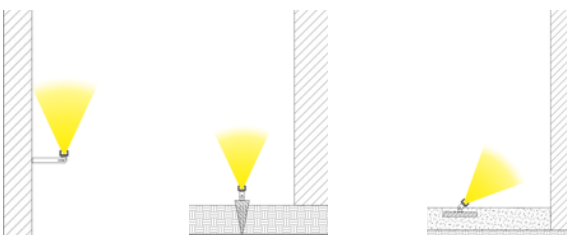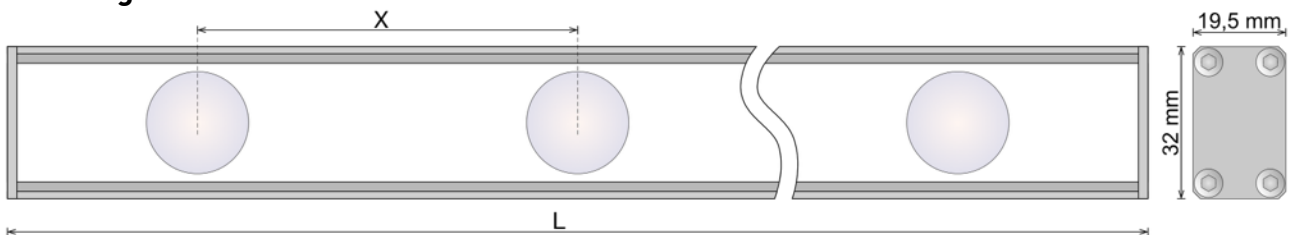

Accessory

- mounting bracket / spike
- constant current - power supply
- connecting cable

