

MLS-IN Micro Line recessed




- opal cover, microprismatic cover
- easy and quick installation
- Dynamic White / RGB / RGBW on request
- high CRI > 90 possible
- special order on request
- incl. mounting material




Technical specifications

lamp	LED		
voltage	24 V=		
power direct	15 W/m	20 W/m	24 W/m
splitting	100 mm		
deep of recess	70 mm		
dimensions	(B x H) 38 x 33 mm		
surface	Alu anodised	white powder-coated RAL 9016	
colour temp.	2700 K	3000 K	4000 K 5000 K
protection	IP40		

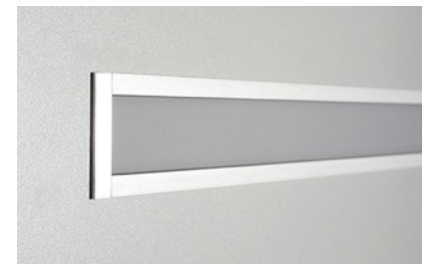


Drawing




Mounting

with tension spring

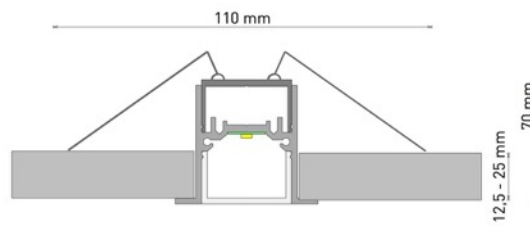

28 x 903 mm / 28 x 1353 mm / 28 x 1803mm

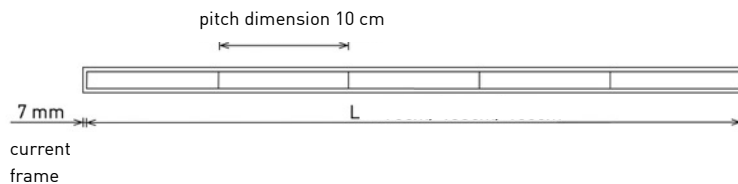


Accessory

- Power Supply 24 V
- connecting cable
- Dali-Dim / Switch-Dim
- 1-10 V Dim

opal cover

power	luminous flux
15W/m	1276lm/m
20W/m	1594lm/m
24W/m	1913lm/m



microprismatic cover

power	luminous flux
15W/m	830lm/m
20W/m	1038lm/m
24W/m	1245lm/m

